

Frame

Dante Donegani & Giovanni Lauda
2015 / 2017

IT – La struttura è composta da due elementi in alluminio estruso: uno esterno a forma di anello e uno interno che permette la diffusione simmetrica della luce verso l'alto e verso il basso. Ispirata all'idea di una maniglia fissata a muro, Frame offre un'elevata performance luminosa.

EN – The structure consists of two extruded aluminium elements: an outer ring-shaped element and an inner one that allows the symmetrical diffusion of the light upwards and downwards. Inspired by the idea of a wall-mounted handle, Frame provides high light performance.

DE – Die Struktur besteht aus zwei stranggepressten Aluminiumelementen: einem äußeren, ringförmigen Element und einem inneren Element, das die symmetrische Abstrahlung des Lichts nach oben und unten gestattet. Frame inspiriert an einem an der Wand befestigten Griffs und bietet hohe Lichtausbeute.

FR – La structure se compose de deux éléments en aluminium extrudé: un élément externe en forme de bague et un élément interne qui permet une diffusion symétrique de la lumière vers le haut et vers le bas. Inspirée par l'idée d'une poignée fixée au mur, Frame garantit une performance lumineuse très élevée.

ES – La estructura está compuesta por dos elementos de aluminio extrudido: uno exterior con forma de anillo y otro interior que permite la difusión simétrica de la luz hacia arriba y hacia abajo. Frame, inspirada en la idea de una manija fijada en la pared, ofrece un elevado rendimiento luminoso.






126



127



Frame: W1

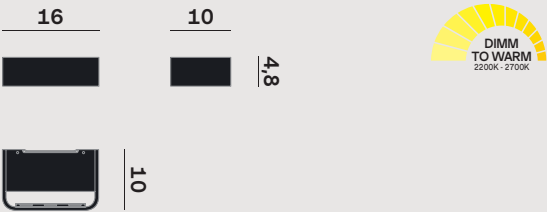

GENERAL

Wall
Surface
On-Off, Phase
IP20
1.600 lumen - luminaire flux
Indoor use

LED


MID POWER LED
2.700K, 3.000K, DTW 2.200K - 2.700K
CRI 90
350mA
Kitting
LED Life L70 B50 > 60.000 h
Energy Class: E

ELECTRICAL

220-240 V 50 Hz
16W
Class 1
Driver included

OPTICAL | PHOTOMETRIC

Lighting type: Indirect
Light distribution: Symmetric



COLOURS

Catalogue

63 Matt white

Satin Collection (upon request)

20 Graphite 33 Royal gold 43 Silver 48 Dark bronze 62 Matt black 64 Bronze 65 Champagne

Warm Collection (upon request)

W2 Sand W4 Rope color W6 Dove-gray W8 Coffee


Metallic Collection (upon request)

14 Antique brass 19 Pelter delabr  22 Copper delabr  23 Gold delabr 

Galvanic(uponrequest)

16 Nickel (brushed) 30 Chrome (glossy)

Frame W2

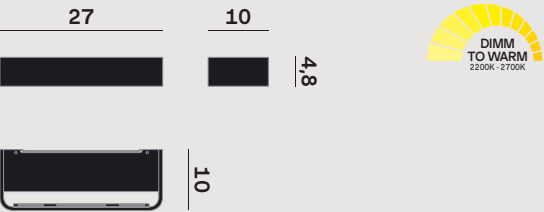

GENERAL

Wall
Surface
On-Off, Phase, Push, Dali
IP20
3.200 lumen - luminaire flux
Indoor use

LED


MID POWER LED
2.700K, 3.000K, DTW 2.200K - 2.700K
CRI 90
700mA
Kitting
LED Life L70 B50 > 60.000 h
Energy Class: E

ELECTRICAL


220-240 V 50 Hz
29W
Class 1
Driver included

OPTICAL | PHOTOMETRIC

Lighting type: Indirect
Light distribution: Symmetric



Frame W3

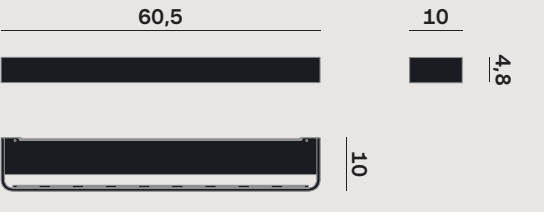

GENERAL

Wall
Surface
On-Off, Push, Dali
IP20
4.950 lumen - luminaire flux
Indoor use

LED


MID POWER LED
2.700K, 3.000K
CRI 90
900mA
Macadam Step 3
LED Life L70 B50 > 60.000 h
Energy Class: E

ELECTRICAL

220-240 V 50 Hz
45W
Class 1
Driver included

OPTICAL | PHOTOMETRIC

Lighting type: Indirect
Light distribution: Symmetric



COLOURS

Catalogue

63 Matt white

Satin Collection (upon request)

20 Graphite 33 Royal gold 43 Silver 48 Dark bronze 62 Matt black 64 Bronze 65 Champagne

Warm Collection (upon request)

W2 Sand W4 Rope color W6 Dove-gray W8 Coffee


Metallic Collection (upon request)

14 Antique brass 19 Pelter delabr  22 Copper delabr  23 Gold delabr 

Galvanic(uponrequest)

16 Nickel (brushed) 30 Chrome (glossy)

Frame W4

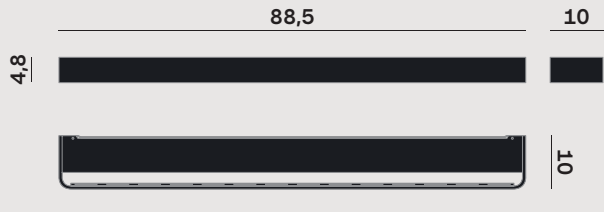

GENERAL

Wall
Surface
On-Off, Push, Dali
IP20
6.390 lumen - luminaire flux
Indoor use

LED

MID POWER LED
2.700K, 3.000K
CRI 90
1200mA
Macadam Step 3
LED Life L70 B50 > 60.000 h
Energy Class: E

ELECTRICAL

220-240 V 50 Hz
57W
Class 1
Driver included

OPTICAL | PHOTOMETRIC

Lighting type: Indirect
Light distribution: Symmetric

